


Cobra® Exhaust Vent for Roof Ridge

Remove excess heat and moisture from your attic and protect your roof system from premature deterioration



- Help reduce the risk of premature roof system degradation, excessive attic heat in the summer, and ice damming in the winter
- Limit the growth of harmful mold and mildew
- Minimize peeling of paint inside and out

Cobra® Exhaust Vent for Roof Ridge

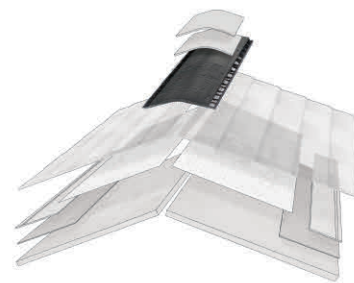

Benefits:

- **Allows heat and condensation to escape** at the most effective location—the ridge
- **Shingle-over design** makes it virtually invisible when installed
- **Includes fasteners for proper installation** of the vent and ridge cap shingles
- **Manufactured with 100% recycled fibers**
- **Flexible roll design** allows for quick and easy installation
- **Compression-resistant** to help reduce waviness that can detract from the look of your roof
- **Passes the 110 mph wind-driven rain test** under controlled laboratory testing per TAS 100-(A)
- **Eligible for up to a Lifetime[†] limited warranty.** It's also an eligible accessory product in the Attic Ventilation category of GAF residential enhanced warranties.

Balanced Ventilation:

Balanced attic ventilation means there's an equal amount of air entering it as there is exiting it. The amount of exhaust ventilation at or near the ridge must **never** exceed the amount of intake ventilation at or near the soffits. There should be a minimum of 1 sq. ft. of net free ventilation for every 300 sq. ft. of attic floor space, but always consult

local building codes to ensure compliance with local ventilation requirements.

How Much Do I Need?

Calculate the total square footage of your attic floor space and then review the chart below for how much Cobra® Exhaust Vent for Roof Ridge is needed:

Total attic sq. footage	Recommended length of Cobra® Exhaust Vent (ft.)*	Minimum Intake Ventilation (net free area in sq. in.)*
1,600	23/28	389/395
1,900	27/33	457/466
2,200	32/38	541/536
2,500	36/43	609/607
2,800	40/48	676/677
3,100	45/53	761/748
3,400	49/58	829/818

* First figure pertains to hand-nailable version; second figure pertains to nail-gunnable version

Note: Chart above based on 1/300 rule. For more information, visit gaf.com/ventcalculator


Product details:

For use in all climates

- Net free ventilating area:
 - **Hand-nailable version:** 16.9 sq. in./lin. ft. (35,772 mm² per lineal meter)
 - **Nail-gunnable version:** 14.1 sq. in./lin. ft. (29,845 mm² per lineal meter)
- Hand-nailable version includes 2 1/2" (64 mm) Smart Nail™ fasteners
- Nail-gunnable version includes 1 3/4" (44 mm) coil nails
- For roof pitches 2:12 to 20:12
- Available in 8" (203 mm), 10.5" (267 mm), and 11.75" (298 mm) widths for use with 10" (254 mm), 12" (305 mm), and metric width ridge cap shingles
- Available in 20' (6.1 m) and 50' (15.24 m) lengths

Code Approvals & Standards:

- Miami-Dade County Product Control Approved
- State of Florida Approved
- UL ERI5072-01
- Texas Department of Insurance Product Evaluation RV-19
- CCMC14083-R
- UL Listed to ANSI/UL 790 Class A[†]

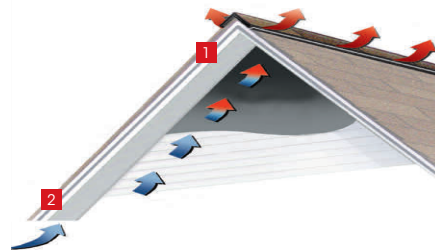

1. Warm, moist air escapes attic through **Cobra® Exhaust Vent for Roof Ridge** (installed under ridge cap shingles)
2. Fresh air enters attic through intake vents at or near the soffit

[†] Lifetime refers to the length of warranty coverage provided and means as long as the original individual owner(s) of a single-family detached residence [or eligible second owner(s)] owns the property where the qualifying GAF products are installed. For other owners/structures, Lifetime coverage is not applicable. Lifetime coverage on shingles requires the use of GAF Lifetime Shingles only. See the *GAF Shingle & Accessory Limited Warranty* for complete coverage and restrictions. Visit gaf.com/LRS for qualifying GAF products. Lifetime coverage on shingles and accessories requires the use of any GAF Lifetime Shingle and at least 3 qualifying GAF Accessories. See the *GAF Roofing System Limited Warranty* for complete coverage and restrictions. For installations not eligible for the *GAF Roofing System Limited Warranty*, see the *GAF Shingle & Accessory Limited Warranty*. Visit gaf.com/LRS for qualifying GAF products.

[†] Refer to UL Online Certification Directory for actual assemblies



To learn more about the Lifetime[†] Roofing System visit gaf.com/Lifetime



We protect what matters most™

