


EverGuard® TPO GAF WalkwayRoll

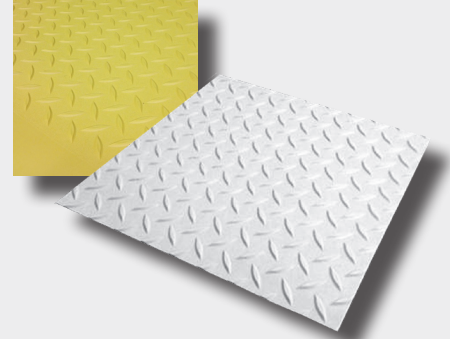

Description:

Protect rooftop membranes exposed to repeated foot traffic with EverGuard® TPO Walkway Roll. Used around HVAC areas, hatches, doors, and other access points, it features a raised diamond pattern for enhanced traction and smooth edges for better welding. Factory-built accessories reduce risk of leaks and callbacks, and help create a uniform aesthetic. This easy-to-install accessory saves time and labor costs, and creates a uniform aesthetic.

Application:

- Heat weld EverGuard® TPO Walkway Roll to the roof membrane surface continuously around the walkway roll perimeter. Rolls must be spaced at least six inches (152 mm) apart to allow for drainage.
- EverGuard® TPO Walkway Roll is designed for use with EverGuard® TPO single-ply membranes and with EverGuard Extreme® and EverGuard® Freedom™ TPO self-adhering membranes.
- The factory-coated accessories may be installed on mechanically attached, fully adhered, or self-adhered EverGuard® TPO roofing systems and specifications manual for detailed instructions.

Product Information:

EverGuard® TPO Walkway Roll is made from EverGuard® and recycled TPO. The roll measures 34" x 50' (864 mm x 15.24 m), and the diamond pattern measures 30" (762 mm) with 2" smooth sides for welding. Rolls provide 125-mil thickness and are available in standard gray or safety yellow.



Visit [gaf.com](https://www.gaf.com)

For additional information, contact GAF Design Services Support at **1-877-423-7663** or designservices@gaf.com

We protect what matters most™

