


6" [152 mm] WIDE FLASHING
GRADE SILICONE CENTERED
OVER PANEL SEAM

METAL ROOF SUBSTRATE WITH PANEL
SEAM PERPENDICULAR TO RIBS

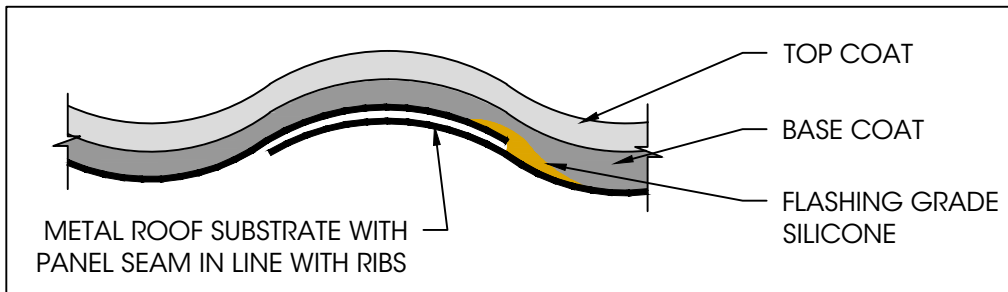

METAL ROOF SUBSTRATE WITH
PANEL SEAM IN LINE WITH RIBS

TOP COAT

BASE COAT

FLASHING GRADE
SILICONE

Notes:

1. Refer to specific coating system for base coat and top coat products.
2. For seam treatment, refer to seam treatment guide.
3. 12" (305 mm) required at perimeter and transition seam.

LEGEND

	Top coat
	Base coat
	Flashing Grade Silicone

Seam Flashing - Corrugated Panels

Roof Area:
Field of Roof

Issue Date:
6/13/23

Scale:
N.T.S.

Detail No:

102