


6" [152 mm] WIDE FLASHING
GRADE SILICONE CENTERED
OVER PANEL SEAM

METAL ROOF SUBSTRATE WITH PANEL
SEAM PERPENDICULAR TO RIBS

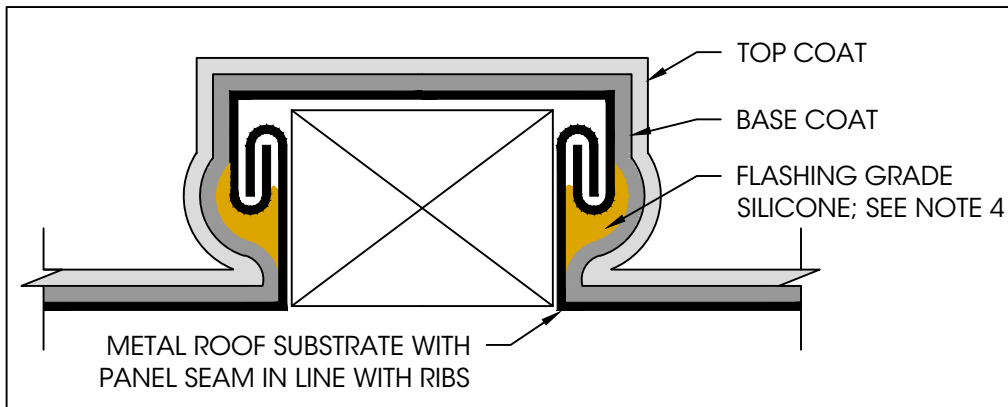

TOP COAT

BASE COAT




FLASHING GRADE
SILICONE; SEE NOTE 4

METAL ROOF SUBSTRATE WITH
PANEL SEAM IN LINE WITH RIBS

Notes:

1. Refer to specific coating system for base coat and top coat products.
2. For seam treatment, refer to seam treatment guide.
3. 12" (305 mm) required at perimeter and transition seam.
4. Vertical seams may forgo flashing grade silicone treatment if the seal/tape is intact on the seam or if they are double locked.

LEGEND

-  Top coat
-  Base coat
-  Flashing Grade Silicone

Seam Flashing - Standing Seam Panels

Roof Area:
Field of Roof

Issue Date:
6/13/23

Scale:
N.T.S.

Detail No:

103