


# LIQUID APPLIED MEMBRANE



**NOTE:**

1. PREPARE ALL SURFACES AS REQUIRED BY GAF SPECIFICATIONS.
2. ALL JOINTS SHALL BE TIGHT AND STABLE. ALL FASTENERS SHALL BE FLUSH WITH THE POLYISO INSULATION.
3. HYDROSTOP™ PREMIUMCOAT® SYSTEM - FOUNDATION COAT, FABRIC, FOUNDATION COAT, AND FINISH COAT COMPONENTS.
4. PRIMING - REFER TO HYDROSTOP™ SPECIFICATIONS FOR POLYISO INSULATION PRIMING REQUIREMENTS.
5. ADHESION TO POLYISO BOARD FACER MUST BE VERIFIED THROUGH ADHESION TEST RESULTING IN MIN. 2 PLI PEEL ADHESION.

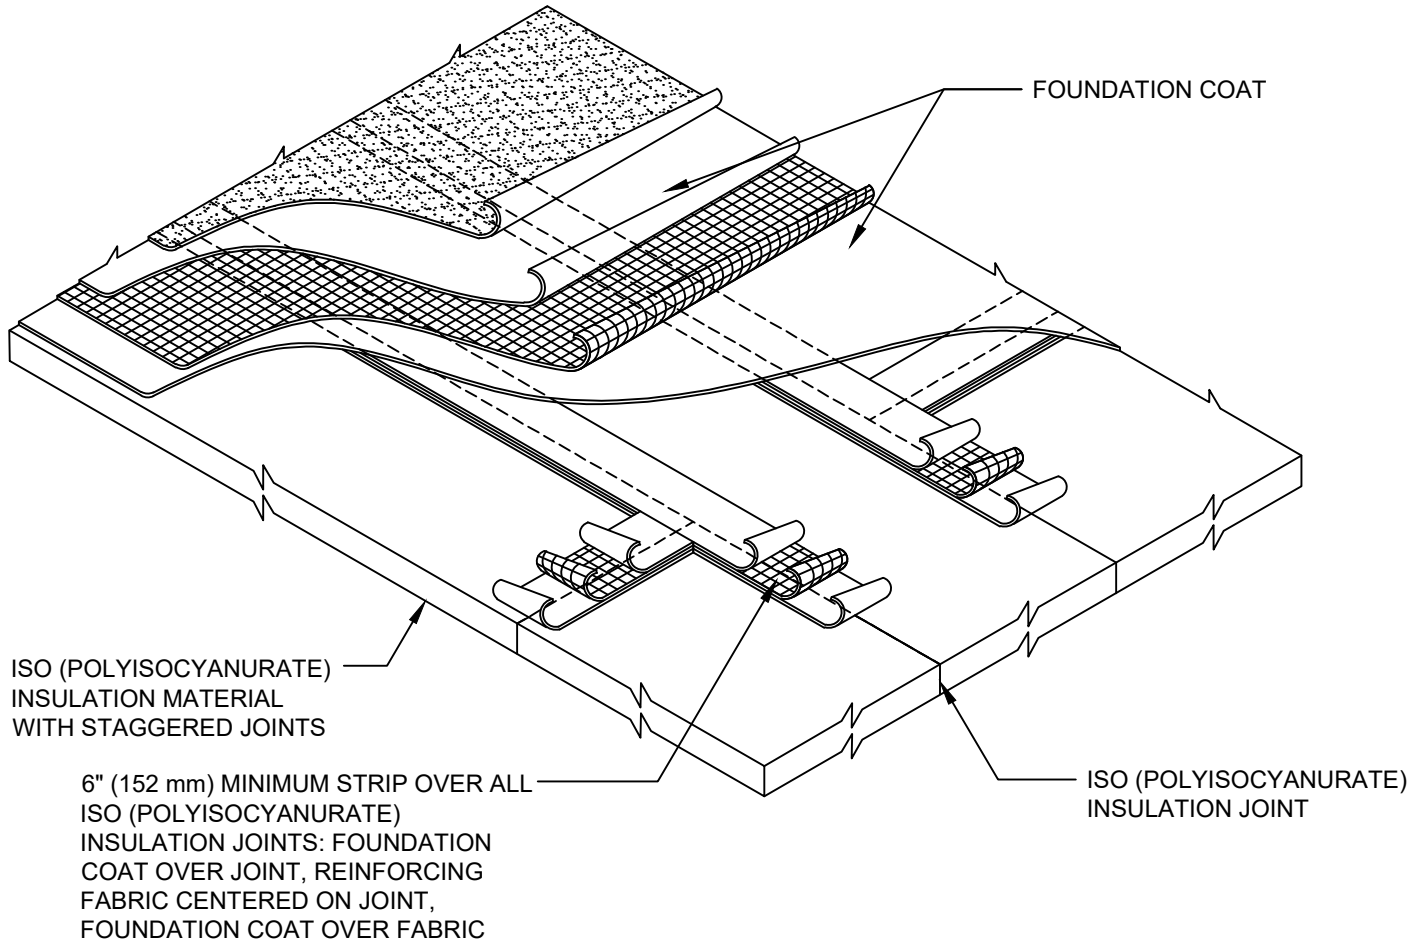



## INSULATION JOINT STRIPPING DETAIL

DRAWING #  
**106**

ISSUE / REVISION DATE  
**4/30/20**

SCALE  
N.T.S.

**LEGEND**

-  FINISH COAT COMPONENT, COLOR AS SPECIFIED
-  REINFORCING FABRIC