


# SINGLE-PLY: TPO & PVC

ANSI/SPRI/FM4435/ES-1 TEST PRESSURES UP TO 117 PSF (HORIZONTAL)

METAL TYPE	MAXIMUM FRONT FACE HEIGHT (in.)	CLEAT (ga.)	PERIMETER PRESSURE (psf)		CORNER PRESSURE (psf)	
			HORIZONTAL	VERTICAL	HORIZONTAL	VERTICAL
0.050" ALUMINUM	6	24	73	N/A	73	N/A
0.050" ALUMINUM	9	22	87	N/A	91	N/A
0.050" ALUMINUM	12	22	116	N/A	109	N/A
24 GA. STEEL	6	24	87	N/A	91	N/A
24 GA. STEEL	9	22	102	N/A	91	N/A
24 GA. STEEL	12	22	102	N/A	91	N/A

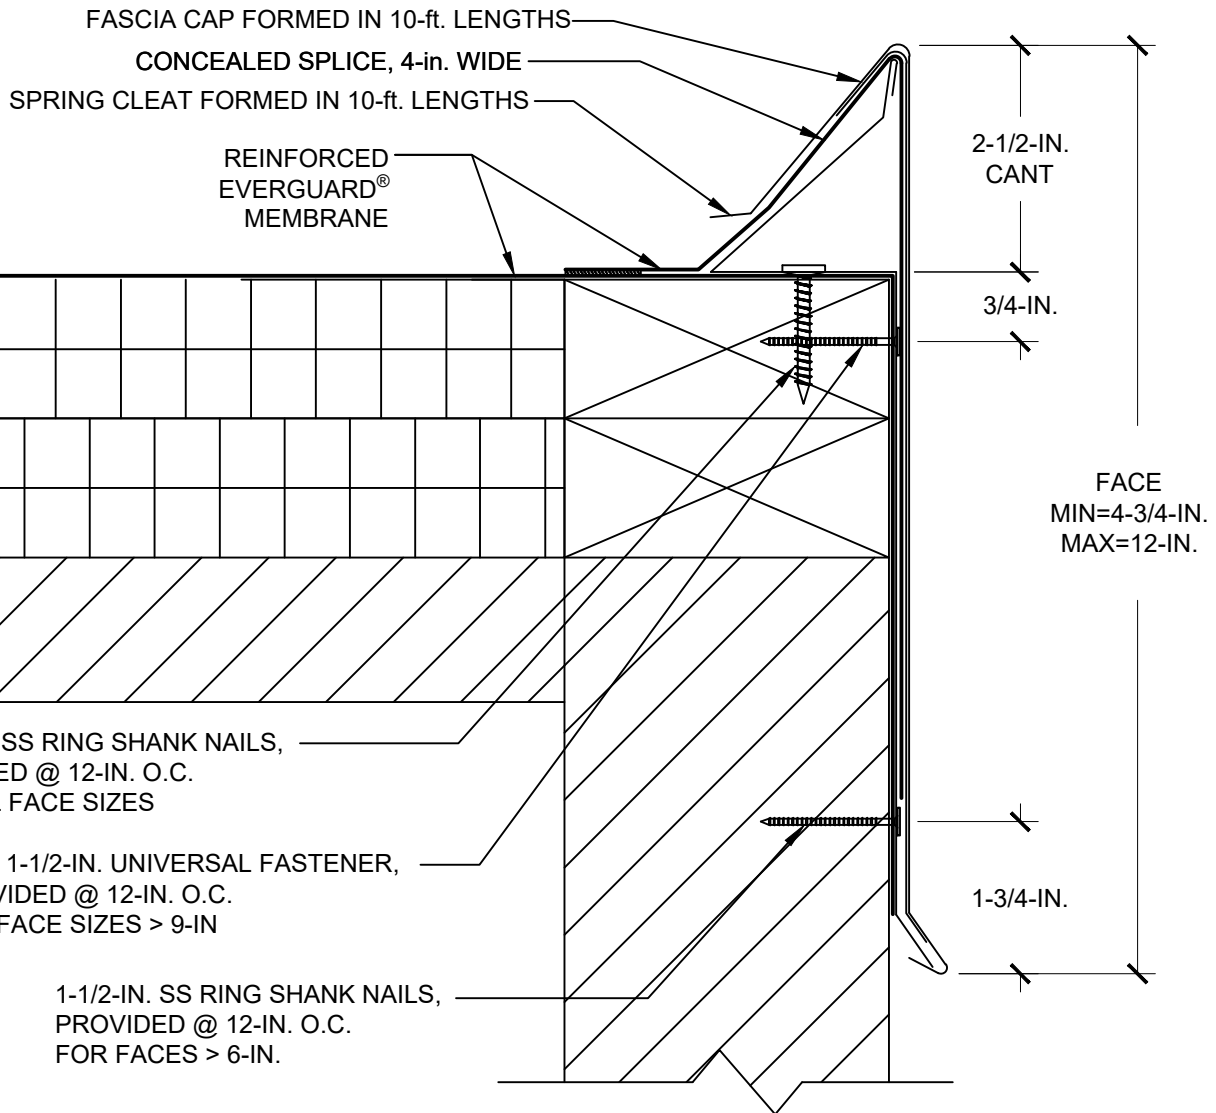

**NOTE:**

1. PRODUCT TO BE INSTALLED IN STRICT ACCORDANCE WITH GAF PRINTED INSTRUCTIONS.
2. PRE-DRILL WITH 3/16-IN. DRILL BIT FOR MASONRY CONDITIONS.
3. CONTACT GAF FOR APPROPRIATE RECOMMENDATIONS NEEDED TO MEET/EXCEED ANSI/SPRI/FM4435/ES-1 DESIGN CRITERIA.



## SNAP-ON FASCIA

DRAWING #  
**206**

THIS DETAIL APPLIES TO:  
ALL SYSTEMS

ISSUE / REVISION DATE  
8/17/20

SCALE  
N.T.S.

LEGEND