


SINGLE-PLY: TPO & PVC

ANSI/SPRI/FM4435/ES-1 TEST PRESSURES UP TO 286 PSF (HORIZONTAL)

METAL TYPE	MAXIMUM FRONT FACE HEIGHT (in.)	PERIMETER PRESSURE (psf)		CORNER PRESSURE (psf)	
		HORIZONTAL	VERTICAL	HORIZONTAL	VERTICAL
0.040" ALUMINUM	6	218	N/A	218	N/A
0.040" ALUMINUM	6.75	204	N/A	200	N/A
0.040" ALUMINUM	8.25	116	N/A	109	N/A
24 GA. STEEL	5.25	276	N/A	271	N/A
24 GA. STEEL	6	218	N/A	218	N/A
24 GA. STEEL	8.25	160	N/A	163	N/A
0.039" ZINC	6	189	N/A	200	N/A

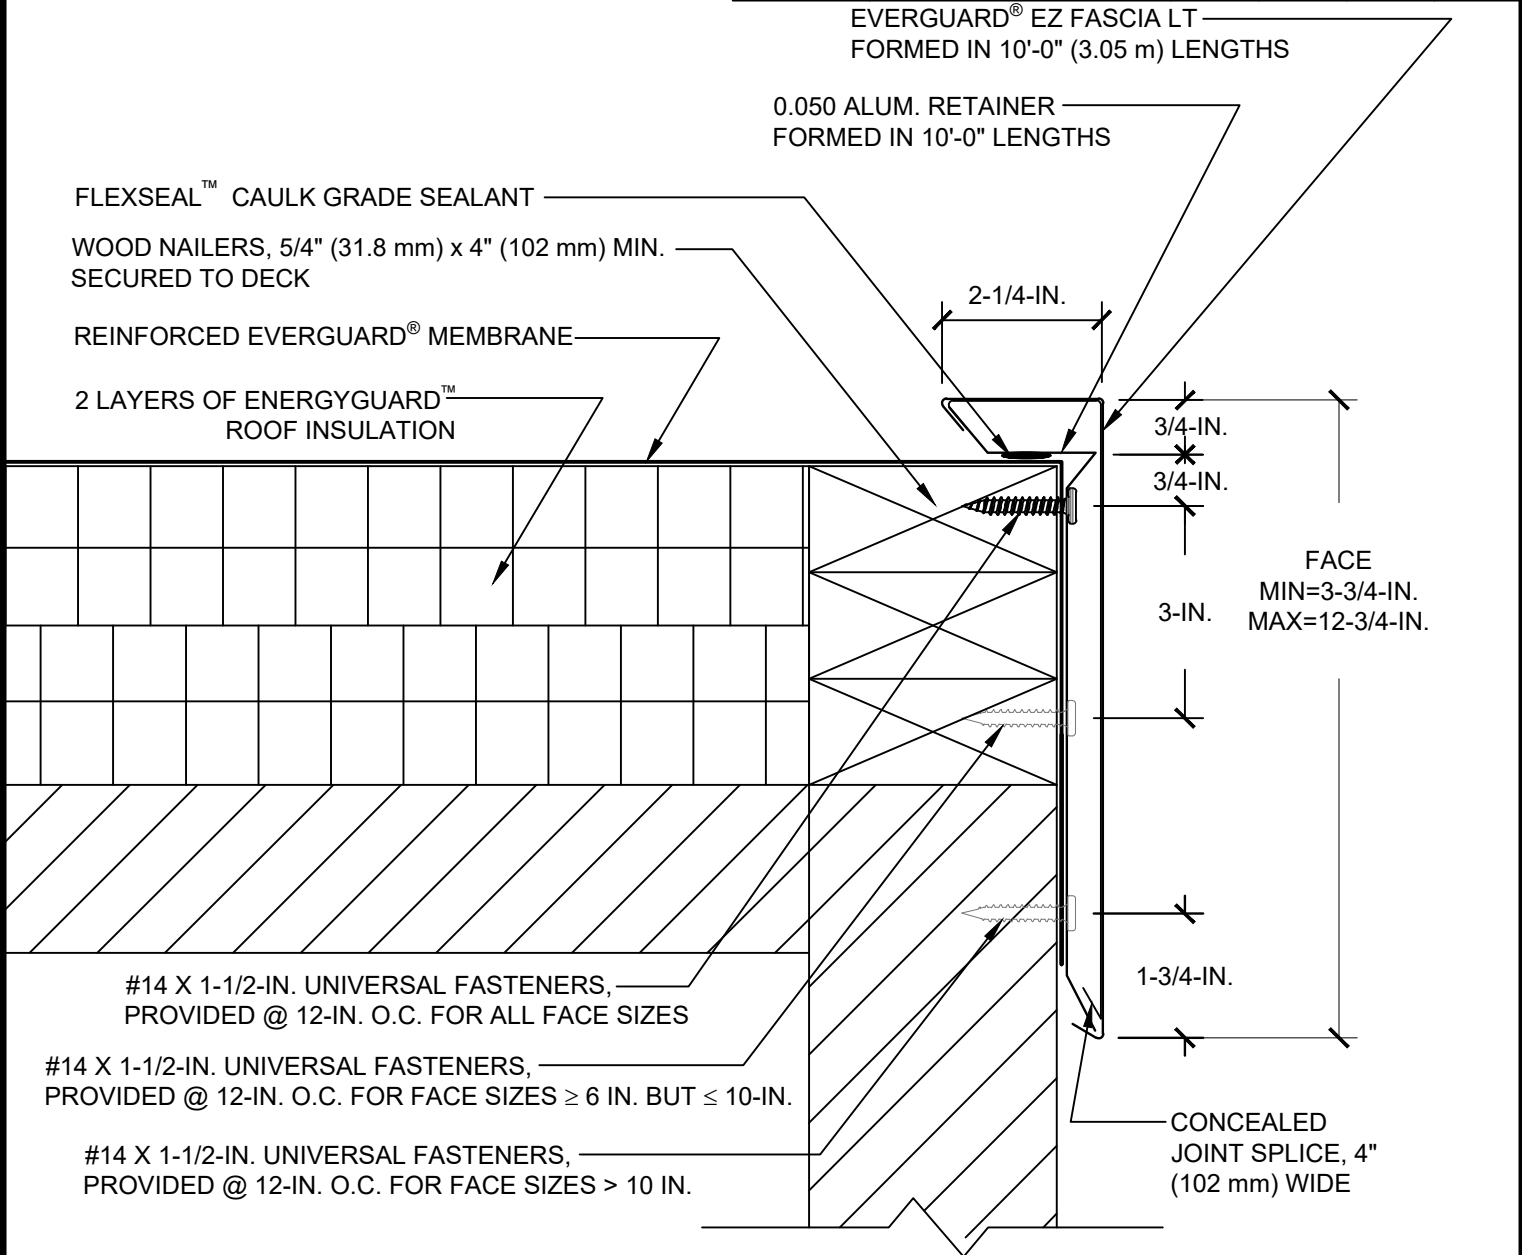

NOTE:

1. PRODUCT TO BE INSTALLED IN STRICT ACCORDANCE WITH GAF PRINTED INSTRUCTIONS.
2. PRE-DRILL WITH 3/16-IN. DRILL BIT FOR MASONRY CONDITIONS.
3. CONTACT GAF FOR APPROPRIATE RECOMMENDATIONS NEEDED TO MEET/EXCEED ANSI/SPRI/FM4435/ES-1 DESIGN CRITERIA.

	EZ FASCIA AR			LEGEND
	DRAWING #	THIS DETAIL APPLIES TO:	ISSUE / REVISION DATE	SCALE
	232C	ALL SYSTEMS	8/17/20	N.T.S.