


FLASHING KEY

- 30" - 66" (762 mm - 1.68 m) REQUIRES BONDING ADHESIVE
- UP TO 30" (762 mm) DRY HUNG

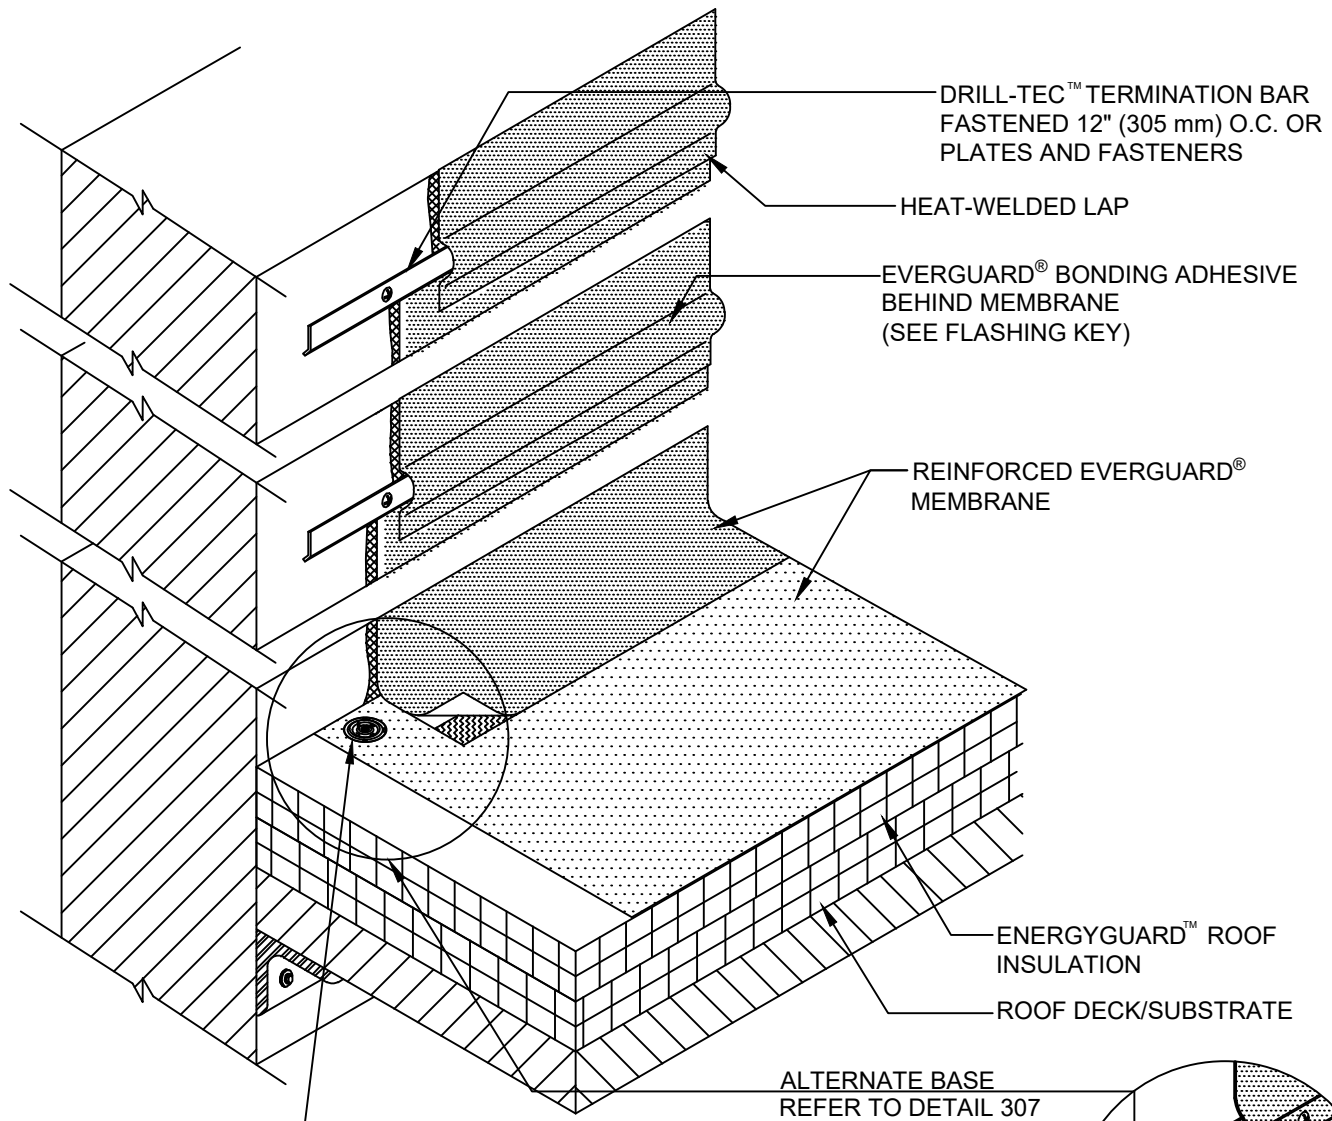

DRILL-TEC™ PLATES & FASTENERS 12" (305 mm) O.C. (6" [152 mm]) O.C. FOR BALLASTED SYSTEMS)

NOTE:


1. FOR INSULATION THICKNESS GREATER THAN 8" (203 mm), A COVER BOARD IS REQUIRED ON MECHANICALLY FASTENED SYSTEMS ONLY.
2. IF EVERGUARD® FREEDOM MEMBRANE IS USED, BONDING ADHESIVE IS NOT NEEDED AND WALL MUST BE PRIMED.



HIGH WALL FLASHING WITH TERMINATION BAR

DRAWING #	THIS DETAIL APPLIES TO:	ISSUE / REVISION DATE	SCALE
317D	ALL SYSTEMS	8/24/20	N.T.S.

LEGEND

 HEAT-WELD LAPS