


Extend non-corroding metal counter flashing over base flashing.

Use one piece metal non-corroding step flashing for each course. Seal overlying shingles to step flashing with asphalt plastic cement.



At least 4"
(102mm)

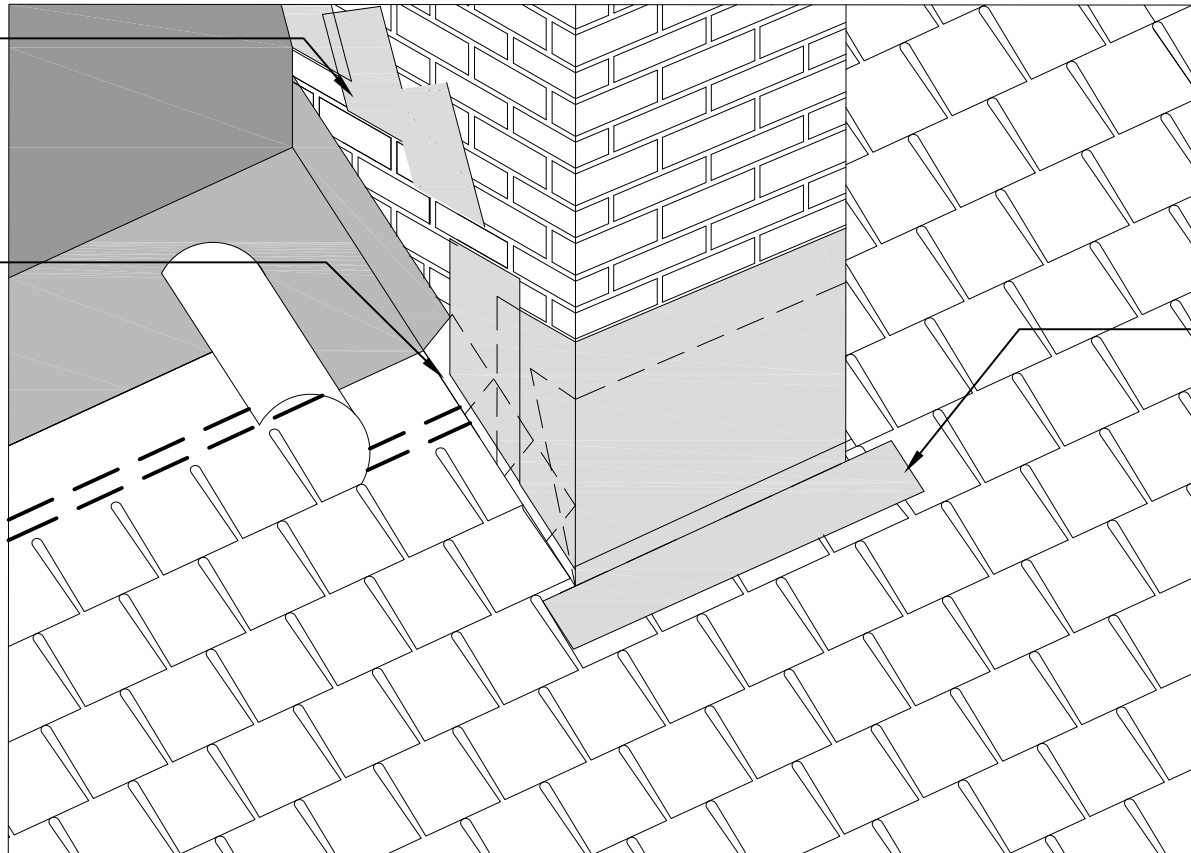

1 Campus Drive
Parsippany, NJ 07054
www.gaf.com

BRAND SERIES

**SLATELINE
SERIES**
Lifetime Shingles

REVISION DATE

9-01-14

SCALE

N.T.S

CHIMNEY FLASHING DETAIL

DETAIL NUMBER

07

DETAIL REFERENCE

SS-SLT