


SINGLE-PLY: TPO & PVC

ANSI/SPRI/FM4435/ES-1 TEST PRESSURES UP TO 260 PSF (HORIZONTAL)

METAL TYPE	MAXIMUM FRONT FACE HEIGHT (in.)	PERIMETER PRESSURE (psf)		CORNER PRESSURE (psf)	
		HORIZONTAL	VERTICAL	HORIZONTAL	VERTICAL
0.040" ALUMINUM	6.75	204	N/A	200	N/A
0.040" ALUMINUM	8.25	146	N/A	145	N/A
0.040" ALUMINUM	11.25	73	N/A	73	N/A
0.050" ALUMINUM	11.25	116	N/A	127	N/A
24 GA. STEEL	6.75	247	N/A	253	N/A
24 GA. STEEL	8.25	160	N/A	163	N/A
24 GA. STEEL	11.25	87	N/A	91	N/A

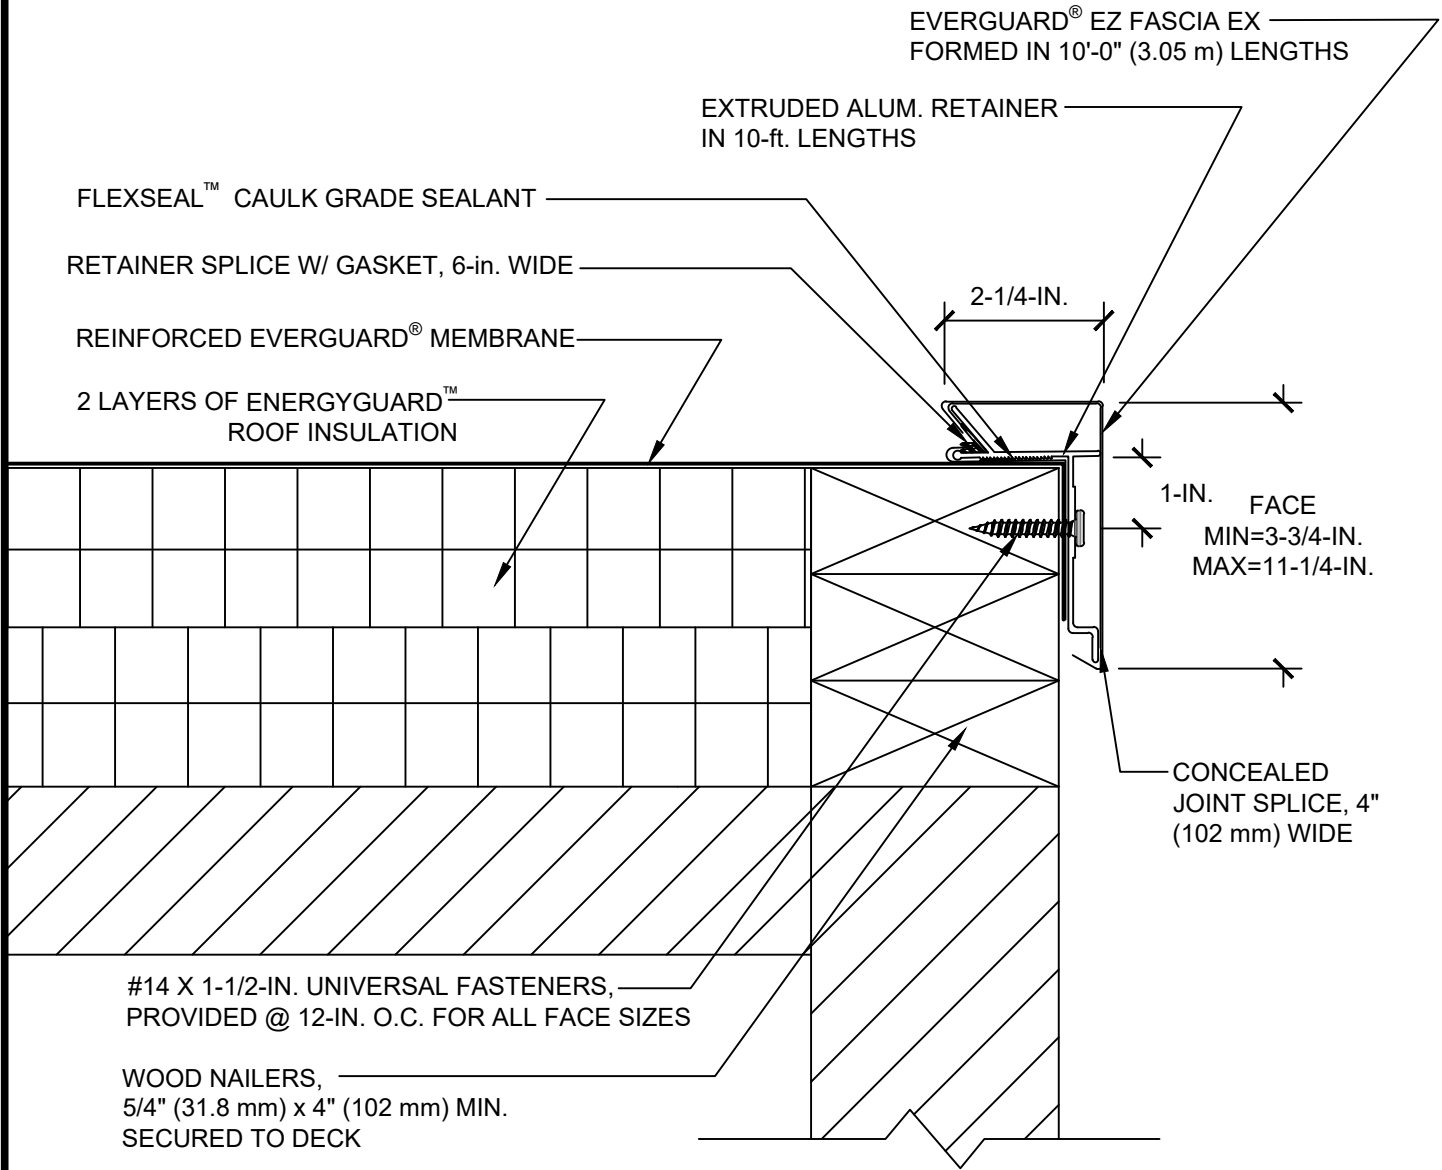

NOTE:

1. PRODUCT TO BE INSTALLED IN STRICT ACCORDANCE WITH GAF PRINTED INSTRUCTIONS.
2. PRE-DRILL WITH 3/16-IN. DRILL BIT FOR MASONRY CONDITIONS.
3. CONTACT GAF FOR APPROPRIATE RECOMMENDATIONS NEEDED TO MEET/EXCEED ANSI/SPRI/FM4435/ES-1 DESIGN CRITERIA.

	EZ FASCIA EX			LEGEND
	DRAWING #	THIS DETAIL APPLIES TO:	ISSUE / REVISION DATE	SCALE
	232D	ALL SYSTEMS	8/17/20	N.T.S.